
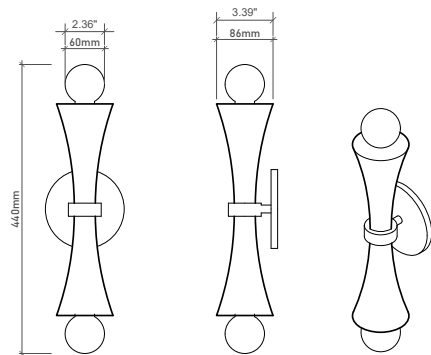


SPECIFICATION

DWG

PRODUCT NO

ML13



The Calyx

Type:	Wall Sconce
Globe type:	2 G9 LED
Voltage:	110V-220V compatible
Wattage:	5W
Environment:	Indoor
Installation:	Hard Wired Wall Sconce

Design Highlights

360° Glowing Ring Light with Brass Accents – Handcrafted Organic Modern Design

Frosted Globe: 4" diameter (10 cm) – easily removable for bulb changes.

Bulb: 2 G9 LED.

Voltage: 110V-220V compatible.

Installation: Hardwired; professional mounting advised for secure placement.

Care Instructions
Onyx Base: Wipe gently with a dry microfiber cloth; avoid water or chemicals.

Features

Handcrafted Uniqueness: Each onyx stone is hand-selected for its pink undertones and veining – no two sconces are alike.

Dual Glow: Light reflects through both the frosted globe and the semi-translucent onyx, creating layered warmth.


Sealed Stone: Treated with a non-toxic sealant to protect against dust and moisture.

Frosted Globe: Dust with a soft brush or lint-free cloth.

Avoid placing near heat sources or in high-humidity areas (e.g., bathrooms).

INSTALLATION


STEP 1

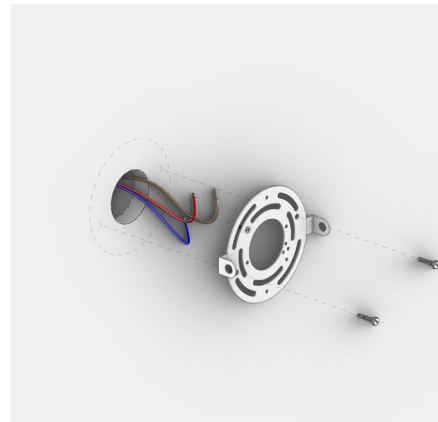

Locate & Mark

- Hold the hanging base against the wall at the desired height.
- Use a level to ensure it's straight, then mark screw hole positions.
- Verify no electrical wires/pipes are behind marked spots


STEP 2

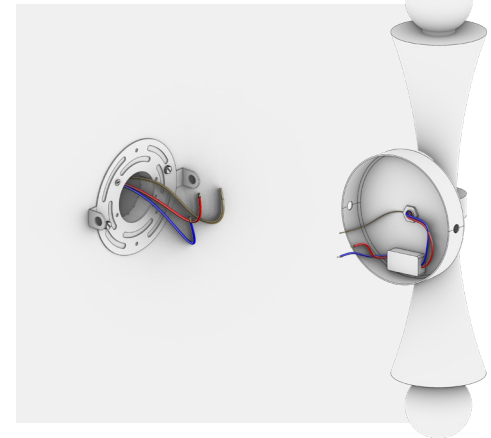

Drill & Secure

- Drill holes at marked points using a masonry bit (for concrete/brick) or wood bit (for studs).
- Insert wall plugs (expansion anchors) if needed.
- Align the hanging base with holes and fasten using screws. Ensure it's firmly attached


STEP 3

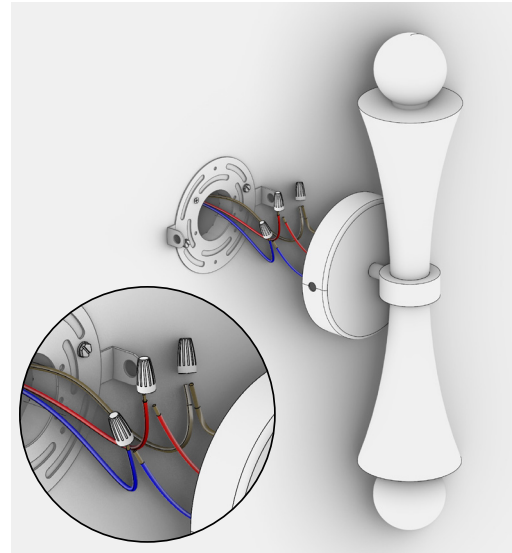

Connect Wires

- Important: Confirm power is OFF
- Feed home wiring through the base's center opening.
- Secure with wire nuts or terminal blocks. Wrap connections with electrical tape.
- Tuck wires neatly into the electrical box.

STEP 4

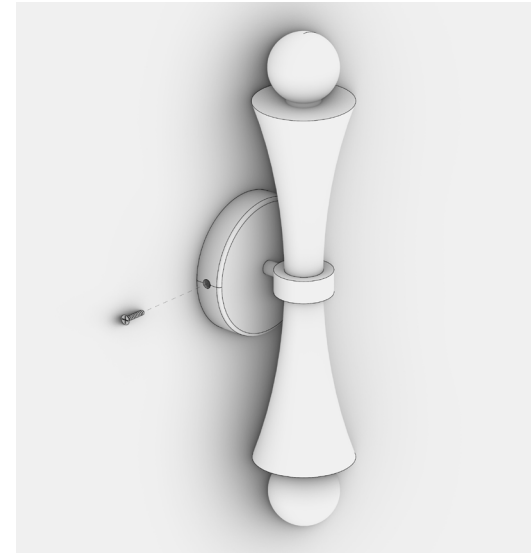

Align the lamp body with the mounted base.

Restore Power & Inspect

- Turn power back on at the breaker.
- Test the light. Check for flickering, unusual sounds, or heat.
- If issues occur, immediately turn off power and recheck connections.