
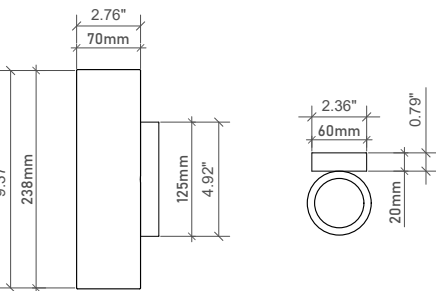


SPECIFICATION

DWG

PRODUCT NO

ML42



Up and Down
Tube Sconce

Type: Sconce

Globe type: 2 G9 LED

Voltage: 110V-220V compatible

Wattage: 5W

Environment: Indoor

Installation: Hard Wired Wall Sconce

Elevate your space with this sculptural wall sconce, a perfect fusion of organic texture and minimalist design featuring a one-of-a-kind cylindrical shade of dramatically veined stone with a rich internal glow. Crafted for sophisticated ambiance, the translucent stone reveals intricate black and gold patterns, casting a warm, dramatic light that illuminates both the fixture and the wall above. The design is anchored by a sleek, minimalist bronze corner mount, ensuring a modern, high-quality finish for any curated interior.

Dimensions & Specifications
Bulb: 1 LED.
Voltage: 110V-220V compatible.


Installation: Hardwired;
professional mounting advised for
secure placement.

Features
Handcrafted Uniqueness: Each
marble is hand-selected for its
veining – no two sconces are alike.

Sealed Stone: Treated with a non-
toxic sealant to protect against
dust and moisture.

INSTALLATION


STEP 1

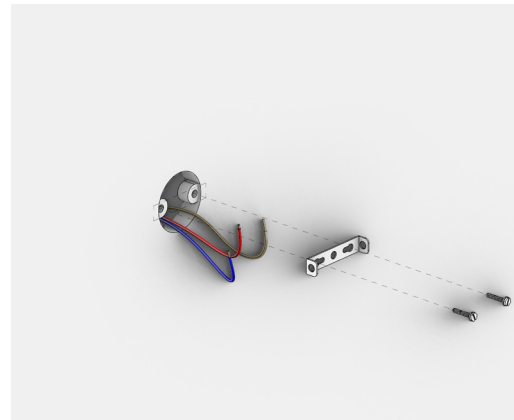

Locate & Mark

- Hold the hanging base against the wall at the desired height.
- Use a level to ensure it's straight, then mark screw hole positions.
- Verify no electrical wires/pipes are behind marked spots


STEP 2

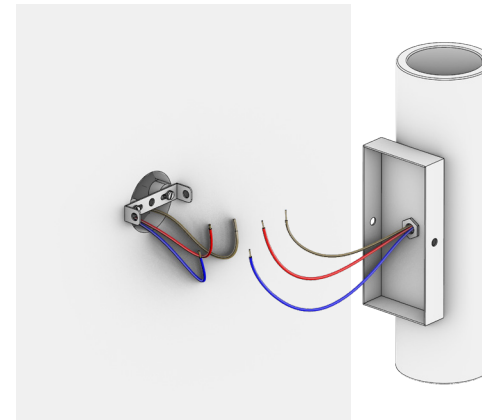

Drill & Secure

- Drill holes at marked points using a masonry bit (for concrete/brick) or wood bit (for studs).
- Insert wall plugs (expansion anchors) if needed.
- Align the hanging base with holes and fasten using screws. Ensure it's firmly attached


STEP 3

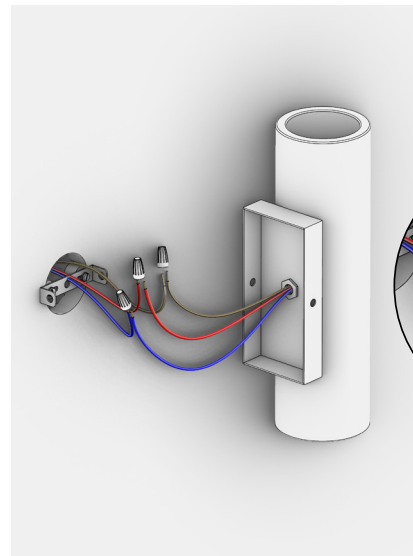

Connect Wires

- Important: Confirm power is OFF
- Feed home wiring through the base's center opening.
- Secure with wire nuts or terminal blocks. Wrap connections with electrical tape.
- Tuck wires neatly into the electrical box.

STEP 4

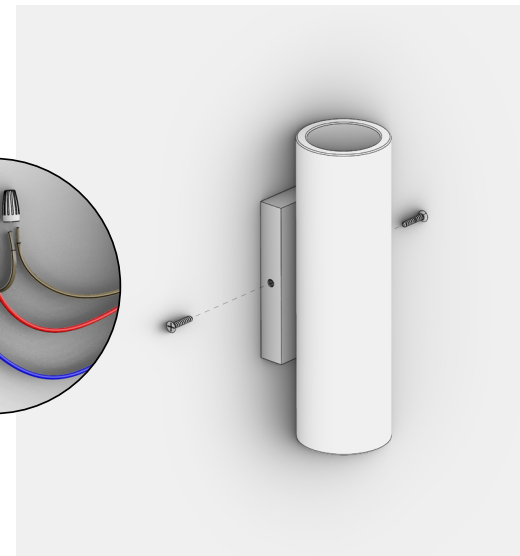

Align the lamp body with the mounted base.

Restore Power & Inspect

- Turn power back on at the breaker.
- Test the light. Check for flickering, unusual sounds, or heat.
- If issues occur, immediately turn off power and recheck connections.